




**SIMPLEX COMMERCIAL
SERVICE LIFTS**

COMBINE LUXURY WITH FUNCTIONALITY

THE **ISO- A MODEL** HAS BEEN VOTED AS OUR **NUMBER 1** SERVICE LIFT FOR **RESIDENTIAL PURPOSES**.

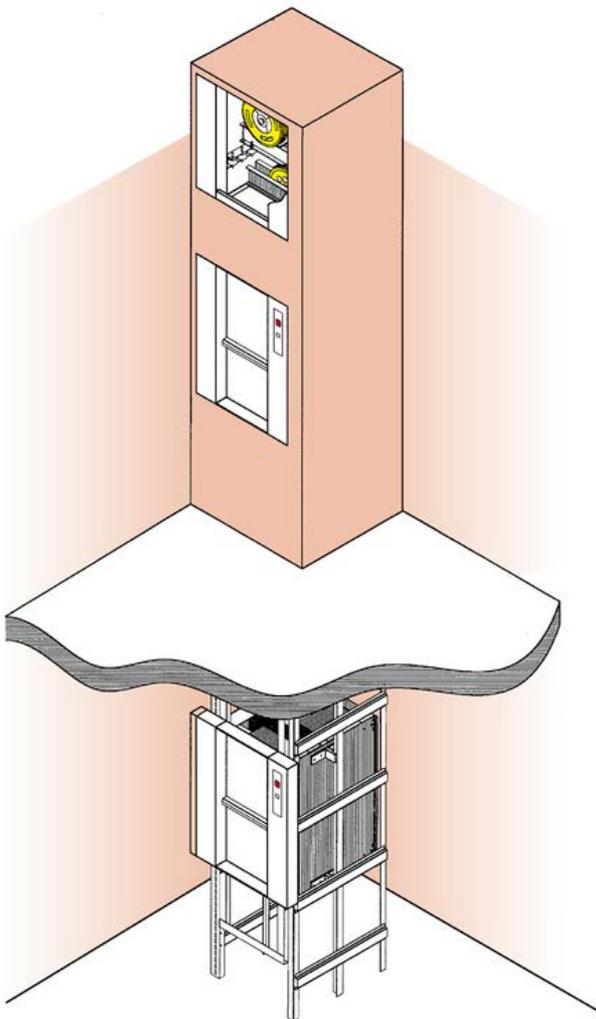

The ISO-A Service Lift opens at service height meaning it requires no bending or straining to load up your lift.

Even the smallest of spaces can accommodate this model due to its intuitively designed and compact bi-parting doors.

Its steel structure and high-quality stainless steel finish make it incredibly durable and easy to clean.

SPECIFICATIONS

Capacity 50kg - 300kg

Speed 0.4 m/s

Cabin Dimensions 400mm - 1000mm depending capacity and internal shelf and compensation device on suspension ropes.

Structure Steel structure, made of cold-rolled galvanised profiles and pre-installed with T-guides T 45 x 5 + plastic trunking in 2 m segments.

Machine Room Door Single hinged door (DW = 800 mm = double hinged), with lock, both hinging sides available.

Drive Unit Standard motor IP 54 disc brake and handwheel, 3 x 400 V /50 Hz.

Vertical Bi-Parting Doors on Serving Height 600 – 1200mm height, manually operated bi-parting doors and side frames made of galvanised steel in accordance to DIN 18092 and door locks type-tested by TÜV-authorities and Australian compliance.

1 High quality Finishes Allow for Easy Cleaning

Its steel structure and high-quality stainless steel finish make it incredibly durable and easy to clean, making it ideal for food preparation areas.

2 Innovative Design ensures the latest technologies

Even the smallest of spaces can accommodate this model due to its intuitively designed and compact bi-parting doors.

3 Rated most Versatile Service Lift

Whether you are transporting groceries to the kitchen, laundry from the bathroom, or books in a library, the ISO- A Service Lift makes this process safer and quicker.






ISO-A GOODS LIFT

COMPACT AND INTUITIVE DESIGN

THE ISO- C MODEL'S BI-PARTING DOORS ENABLE IT TO FIT IN THE SMALLEST OF SPACES.

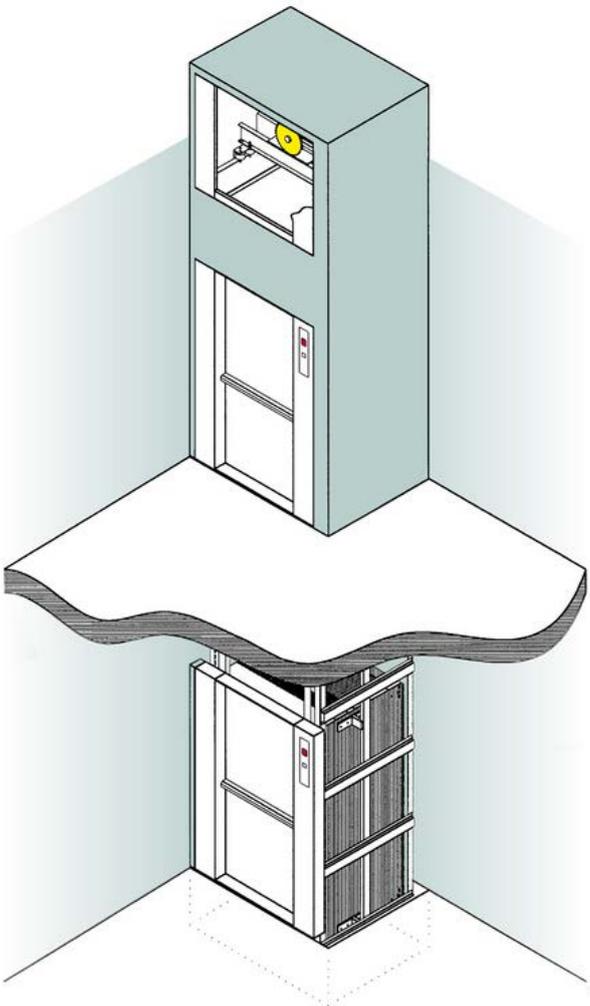

Whether you work in an RSL or hospital kitchen, this Service Lift will provide a helping hand in transporting your goods, saving you time, and reducing the risk of strain injuries.

With endless customisation options available, we can tailor this model to fit your functional and spatial requirements.

The bi-parting door at floor level allows equipment such as trolleys to be wheeled in for easy transportation.

SPECIFICATIONS

Counter Weight
or Balancing Weight

Galvanized frame construction with iron infills.

Bi-Parting Doors

Manually operated bi-parting doors and side frames made of galvanized steel in accordance to DIN 18092 and door locks type-tested by TÜV-authorities and Australian Standards.

Cabin

Adjustable guide shoes on both sides of the cabin and a compensation device on the suspension ropes.

Structure

Steel structure, made of cold-rolled galvanized special profiles and pre-installed with T-guides T 45 x 5 + plastic trunking in 2 m segments.

Machine Room
Door

Single hinged door (DW = 800 mm = double hinged), with a sash lock, both hinging sides available.

Drive

Drive unit with standard motor IP 54 disc brake and handwheel, 3 x 400 V /50 Hz. according to IEC and Q = 50 – 100 kg: sheave 300 diameter for 2 ropes 6 mm.

Controller

The call and send control with 24 V, safety circuit 230 V, is pre-wired with plugs, has an adjustable and time-limited despatch delay device (1-5s), and an acoustic arrival signal. There is a position indicator on each entrance with thermic motor protection as the main switch is pre-wired on the control panel.

A long, bright hospital hallway with a service lift in the center. The hallway is clean and modern, with white walls and a light-colored floor. The ceiling has several recessed lights. In the background, there is a blue door and a medical monitor on a stand. The service lift is a white, compact unit with a blue base and a white platform.

1 **Intuitive and Compact Design**

The ISO-C model is the perfect Services Lift for commercial properties that are lacking in space as its intuitively designed bi-parting doors enable it to fit in the smallest of spaces.

2 **'Wheel in' Convenience**

ISO-C has a variable travel height, a load capacity of 300kg, and has the option of floor level positioning, allowing workers to conveniently wheel goods in on dollies or trolleys.

3 **Service Lifts Move Heavy Loads With Ease**



Eliminate the dangerous task of carrying heavy loads up and down stairs manually by installing an ISO-C lift. This reduces the risk of strain injuries, musculoskeletal disorders, trips, and falls.



ISO-C GOODS LIFT

UNPACK DELIVERIES WITH EASE

OUR VARYING MODELS **TRANSFORM** THE WAY YOU MOVE IN **COMMERCIAL** ENVIRONMENTS.

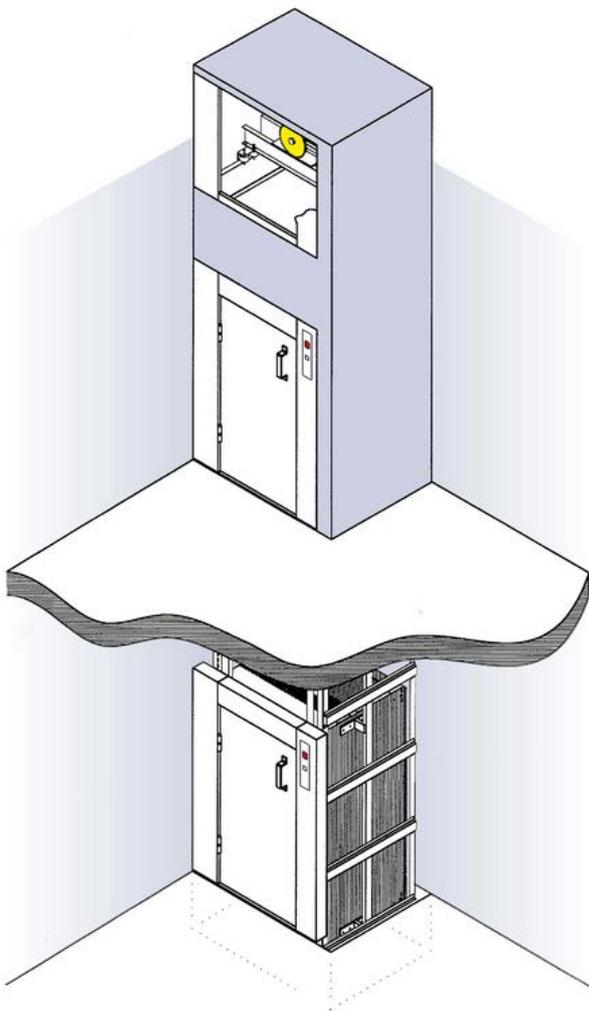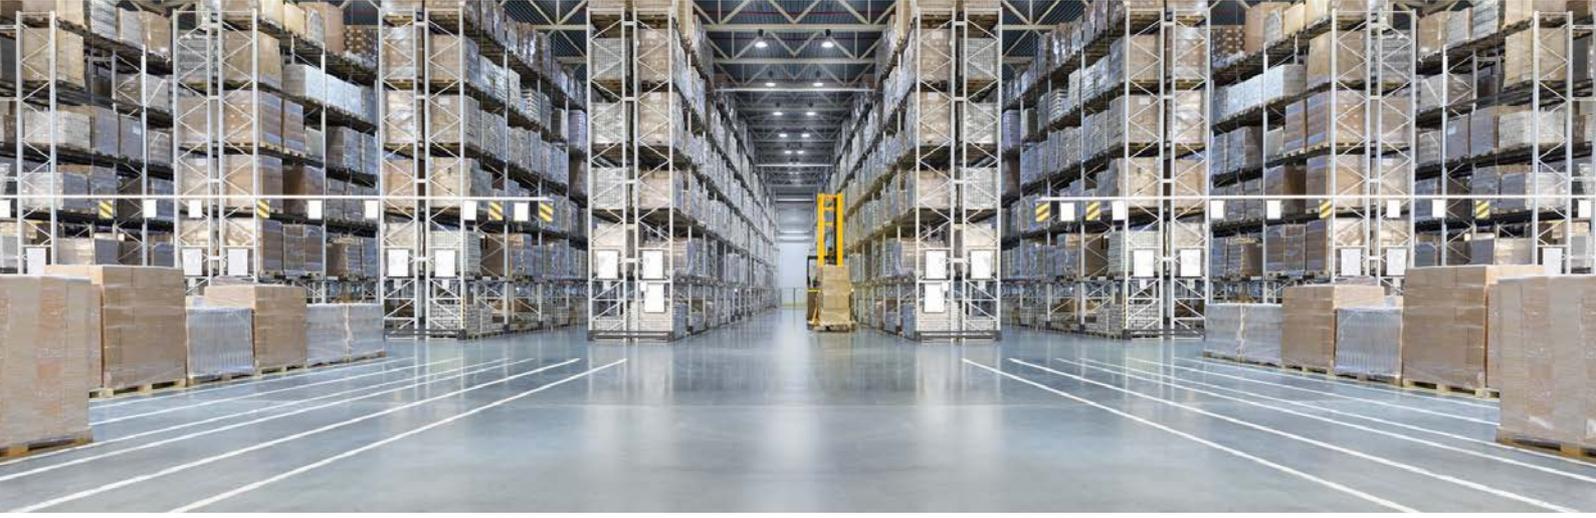

The ISO-D Service Lift is customisable to suit specific buildings or space limitations making it the most versatile Service Lift model.

The ISO-D lift is perfect for commercial spaces that are not limited by space. Its hinged swing door allows for a quick installation and saves you money on excavation costs as it is the only model that does not require a pit.

The heavy-duty lift can move bulky and heavy objects with ease, saving you and your employees from strain injuries.

SPECIFICATIONS

Structure	Steel structure, made of cold-rolled galvanized profiles and pre-installed with T-guides, T 45 x 5 + plastic trunking in 2 m segments.
Cabin	Adjustable guide shoes on both sides of the cabin and a compensation device on the suspension ropes.
Hinged Doors	Manual operated hinged doors and side frames made of galvanized steel in accordance to DIN 18090 and door locks type-tested by TÜV-authorities and Australian Standards.
Machine Room Door	Single hinged door (DW = 800 mm = double hinged), with a sash lock, both hinging sides available.
Drive Unit	Drive unit with standard motor IP 54 disc brake and handwheel, 3 x 400 V /50 Hz. according to IEC Q = 100 kg: sheave 300 diameter for 2 ropes 6 mm, Q > 100 – 300 kg.
Counter Weight or Balancing Weight	Galvanized frame construction with iron in fills.
Controller	The call and send control with 24 V, safety circuit 230 V, is pre-wired with plugs, has an adjustable and time-limited despatch delay device (1-5s), and an acoustic arrival signal. There is a position indicator on each entrance with thermic motor protection as the main switch is pre-wired on the control panel.



1 Single or Double-Hinged Doors for **Swift Access**

The lifts' galvanised steel shaft is strong and stable, and the automatic push buttons that control the lift are simple to use. The trolley lifts shallow pit requirement makes it simple to install and keeps building works to a minimum.

2 Simplex takes **Safety** to **New Heights**

Like all our Service Lifts, the ISO-D has several innovative features, including arrival buzzers, call signals, and position indicators on each landing station. A safety system prevents the trolley lift from operating if overloaded.

3 Exclusive Range of **High Quality Finishes**

We have a range of stainless steel varieties to choose from, varying in colours and patterns, as well as different grades of steel to suit different site requirements.



ISO-D GOODS LIFT



**WHAT SERVICES DO WE
PROVIDE?**

Our team of Industry Trained Technicians is here to help throughout the whole process. From Installation to Maintenance, to Modernisation to Repairs, we are dedicated to providing the same premium service we have committed ourselves to since 1976.



INSTALLATION

Installation options are endless with either our standardised range or our tailor-designed and manufactured equipment to meet a specific development requirement or custom solution need.



MAINTENANCE

To ensure your Simplex Service Lift continues to operate at its optimum, we offer cost-effective, tailored maintenance plans and services with one of our industry-trained Simplex Elevators technicians.



MODERNISATION

Give your Service Lift a new lease on life with Simplex's multitude of modernisation and upgrade options. If modernisation is an option for your equipment, it can be a cost-effective alternative to replacing the lift with another product.



REPAIR

Should you experience an unplanned equipment failure, know you're in good hands with Simplex Elevator's 24/7 emergency response unit. Our technicians will locate the problem, resolve the issue and recommend further action to prevent future disruptions.



Lifts for all your Residential, Commercial, and Disability Access Needs.

If you have any questions, please do not hesitate to get in touch.

E info@simplexelevators.com.au

P (07) 3881 3355



[@simplex.elevators](#)

www.simplexelevators.com.au

Head Office Unit 3/44 Leonard Street, Woolloongabba, QLD 4102

Please be advised this publication is for general information purposes only. Simplex Elevators reserves the right to make alterations to the product type and specifications at any time. Simplex Elevators complies with all Australian Standards and International Best Practices. Please note drawings and measurements are a guide only and should not be used without consultation with a Simplex Professional.